



**BENDEZU  
PORT  
EQUIPMENT**

# Bendezu Port Equipment

MAQUINARIA PORTUARIA DE SEGUNDA MANO – USED PORT EQUIPMENT FOR SALE – GEBRAUCHTE HAFENTECHNIK

## FANTUZZI MHC 150



**YEAR:2001**

**WORKING  
HOURS:8.000 hrs.**

**LIFTING  
CAPACITIES: 100 to.**

**2 ROPES**

[ventas@suministrosportuarios.com](mailto:ventas@suministrosportuarios.com)

[info@bendezu.com](mailto:info@bendezu.com)

+34 679 449 189

+49 176 727 176 54



BENDEZU  
PORT  
EQUIPMENT

# Bendezu Port Equipment

MAQUINARIA PORTUARIA DE SEGUNDA MANO – USED PORT EQUIPMENT FOR SALE – GEBRAUCHTE HAFENTECHNIK


## FANTUZZI MHC 150



OPERATOR MANUAL

MHC

### 3.3 GENERAL ASSEMBLY

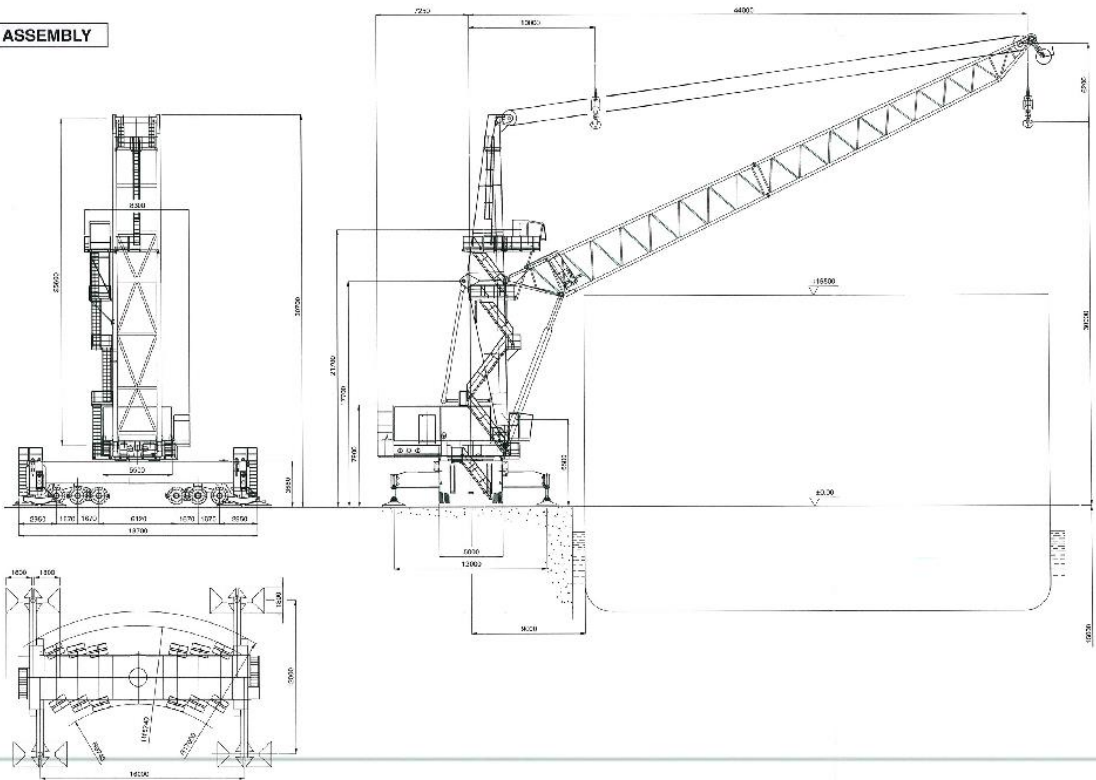

MHC 150  
GM 3600

04/02/21 05/21

1287

[ventas@suministrosportuarios.com](mailto:ventas@suministrosportuarios.com)

[info@bendezu.com](mailto:info@bendezu.com)

+34 679 449 189

+49 176 727 176 54



# Bendezu Port Equipment

MAQUINARIA PORTUARIA DE SEGUNDA MANO – USED PORT EQUIPMENT FOR SALE – GEBRAUCHTE HAFENTECHNIK

## FANTUZZI MHC 150



R0123.EC1

### TECHNICAL DATA

3.1

#### Performances and characteristics

• Hook capacity	t	100/65/50/35/17
• Hook speed	m/min.	16/24/31/43/87
• Slewing maximum speed with load:		
- intensive use	rpm	1,25
- heavy use	rpm	0,65
• Boom luffing time:		
- intensive use - from min. to max range	sec.	34
- from max to min. range	sec.	38
- heavy use - from min. to max range	sec.	68
- from max to min. range	sec.	75
• Travel speed	km/h	2,0 ÷ 4,5
• Minimum operating radius	m	10,00
• Maximum operating radius	m	44,00
• Hoisting height with linearity of load:		
- standard up to 44 m	m	30,00
- optional up to 40 m	m	40,00
from 40 m to 44 m	m	30,00
• Working depth below quay level	m	15,00
• Maximum gradient	%	7,5
• Outside steering radius	m	17,00
• Platform slewing radius	m	7,25

#### Capacities

• Maximum moment	t/m	2100
• Power of diesel engine	kW; rpm	741; 1.500
• Power of electric motor (optional)	kW; rpm	630; 1.500
• Maximum hoisting tackle	n.	2 x 1
• Maximum boom length	m	46,00
• Height of boom fulcrum	m	17,60
• Operator cab view height	m	21,50
• Maximum stabilizers open	m	16,00 x 12,00
• Maximum load on stabilizers (360°)	t	212

#### Dimensions

• Maximum crane length	mm	18700
• Maximum crane length with lowered boom	mm	73000
• Maximum crane length:		
- for transport	mm	5500
- with walkways	mm	7800

CRS301.0262

[ventas@suministrosportuarios.com](mailto:ventas@suministrosportuarios.com)

[info@bendezu.com](mailto:info@bendezu.com)

+34 679 449 189

+49 176 727 176 54